


STELLAR

Draft

2N+78 Dual-Glass Bifacial Module
765W-800W

Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values



red dot winner 2023



Product Warranty



Performance Warranty



IEC 61215 IEC 61730
2014/35/EU



ISO 9001:2015 ISO 14001:2015 ISO 45001:2018

Warranty partner

Munich RE 



800W
Output

24.9%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

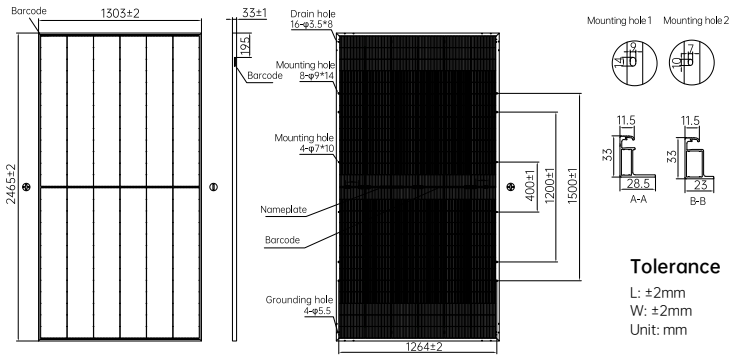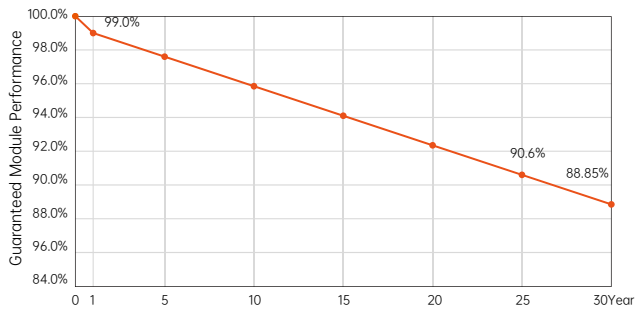

Electrical Characteristics (STC: AM1.5 1000W/m ² 25°C NOCT: AM1.5 800W/m ² 20°C 1m/s)																	Power Tolerance:0~ +3%							
Module Type	AIKO-A765-GRH78Dw			AIKO-A770-GRH78Dw			AIKO-A775-GRH78Dw			AIKO-A780-GRH78Dw			AIKO-A785-GRH78Dw			AIKO-A790-GRH78Dw			AIKO-A795-GRH78Dw			AIKO-A800-GRH78Dw		
	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
P _{max} [W]	765	580	840	770	584	845	775	588	850	780	592	855	785	595	860	790	599	865	795	603	870	800	607	875
V _{oc} [V]	58.62	55.58	58.62	58.72	55.68	58.72	58.82	55.77	58.82	58.92	55.87	58.92	59.02	55.96	59.02	59.12	56.05	59.12	59.22	56.15	59.22	59.32	56.24	59.32
V _{mp} [V]	48.67	46.27	48.70	48.77	46.36	48.80	48.87	46.46	48.90	48.97	46.55	49.00	49.07	46.65	49.10	49.17	46.74	49.20	49.27	46.84	49.30	49.36	46.93	49.40
I _{sc} [A]	16.57	13.34	18.18	16.64	13.40	18.26	16.71	13.46	18.34	16.78	13.53	18.42	16.85	13.59	18.50	16.92	13.66	18.58	16.99	13.72	18.66	17.06	13.78	18.74
I _{mp} [A]	15.72	12.54	17.25	15.79	12.60	17.32	15.86	12.65	17.38	15.93	12.71	17.45	16.00	12.76	17.52	16.07	12.82	17.58	16.14	12.87	17.65	16.21	12.93	17.71
Module Efficiency	23.8%			24.0%			24.1%			24.3%			24.4%			24.6%			24.8%			24.9%		

Product Specification	
Bifacial Factor	80±5%
Cell Type	N-Type ABC
Glass	Dual glass, 2.0 + 2.0mm coated semi tempered glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) +400mm, -200mm or Customized Length
No. of Cells	156(6*26)
Junction Box	IP68, 3 bypass diodes
Connector	MC4 Compatible
Weight	39.8kg±3%
Dimension	2465*1303*33mm
Package Detail	33pcs per pallet / 132pcs per 20'GP / 594pcs per 40'HC

Temperature Ratings (STC)	
Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide	
Operation Temperature	-40°C - +70°C
Maximum Series Fuse Rating	30A
Protection Class	Class II
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Fire Rating	IEC Class A